


MatixGo

JW4268LC - JG4268LC - JB4268LC
JW4268ST - JG4268ST - JB4268ST
JW4268SC - JG4268SC - JB4268SC

Fibre optic feedthrough sockets

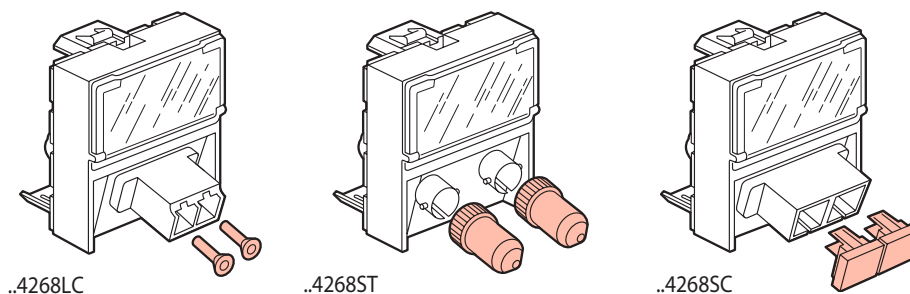

..4268LC

..4268ST

..4268SC

Use


Rfc dg`pc mnrja dccbrfpmsef qmaicrq f`tc bsnjcv mp bms`jc qg knjcv
dccbrfpmsef qg O g lnsrq-O msnsrq,
Rfcw`pc sqcb rm am l l car O dg`pcq &dgrrcb ugrf rfcgp am l l carmpq',
Rfcw`pc qsnnjgcb ugrf nrmrcargtc a\_nq`lb dgrrcb ugrf`rp`lqn`pc l r
k`picp fmjbcg,

Range

Designation	Item
Amsnjg le am l l carmp dmp dg`cp mnrja a`jc + JA rcp kg l`rgm l + bsnjcv + O kmbsjcq	☐ JW4268LC ☒ JG4268LC ☒ JB4268LC
Amsnjg le am l l carmp dmp dg`cp mnrja a`jc + QR rcp kg l`rgm l + bsnjcv + O kmbsjcq	☐ JW4268ST ☒ JG4268ST ☒ JB4268ST
Amsnjg le am l l carmp dmp dg`cp mnrja a`jc + QA rcp kg l`rgm l + bsnjcv + O kmbsjcq	☐ JW4268SC ☒ JG4268SC ☒ JB4268SC

Colors: ☐ White ☒ Grey ☒ Black

Overall dimensions (mm)

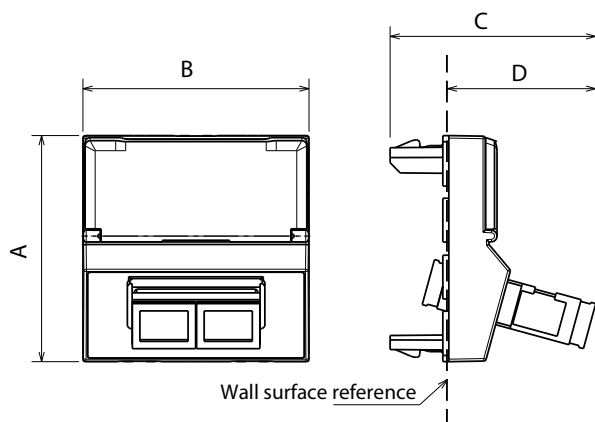

	A	B	C	D
..4258LC	45.1	45	42.7	31.3
..4268ST	45.1	45	41	29.6
..4258SC	45.1	45	36.7	25.3

Technical characteristics

- **Protection index:**
(considering a complete installation, including cover plate)

- Penetration by solid bodies/liquid: IP20
- Impact test: IK03

- **Material characteristics:**

- Cover: ABS
- Connector LC - SC: Ceramica
- Connector ST: Bronzo
- Halogen Free
- UV resistant
- Self-extinguishing: 650°C/30s

- **Climatic characteristics:**

- Storage temperature: -10° C a +70° C
- Use temperature: -5° C a +35° C

- **Caratteristiche del connettore:**

Connector LC

- Insertion loss: 0,2 dB
- Coupling duration: 500
- Forza di ritenzione del connettore: 1N - 2.5N

Connector ST

- Insertion loss: 0,15 dB
- Coupling duration: 500
- Connector retention force: 1N - 2.5N

Connector SC

- Insertion loss: 0,2 dB
- Coupling duration: 500
- Connector retention force: 2N - 5.9N

Cleaning

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards ICA 4/532 - R?+346+@,1

Pefer to e.catalogue.