




Wattstopper
Emergency Lighting Control Unit for KO Mounting
Part No. ELCU-200

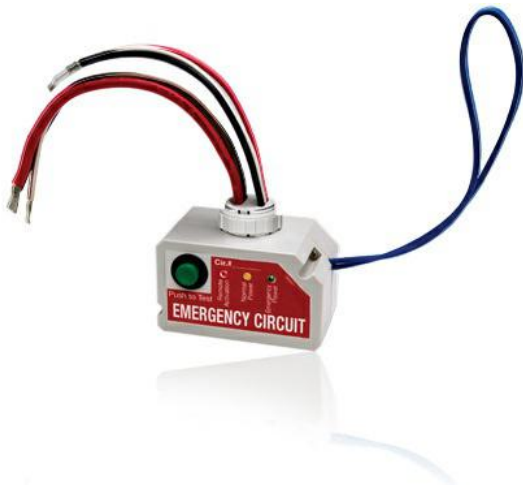

Wattstopper's ELCU-200 Emergency Lighting Control Unit is a self-contained device that allows any standard lighting control device to control emergency lighting in conjunction with normal lighting in any area within a building.

Features & Benefits

- Eliminates energy waste caused by emergency lighting that is always on
 - Integral push-to-test button activates emergency mode for a true test condition
- Connects to EMTS-100 Remote Test Switch or other input to activate emergency on from a remote location
 - Operates as a control device or as a shunt
- Senses local single circuit power failure
 - Zero cross switching technology for reliability and increased product life
- Compatible with Wattstopper occupancy sensors, daylighting controls, lighting control panels, and dimmers

Specifications

General Info

Product Line	Wattstopper	Color	Red, White
UPC Number	754182923052	Country Of Origin	China
Material	ABS	Product Series	ELCU
Features	Push-to-Test on Device	Installation Location	Above Ceiling
Application Sector	Commercial	Standard	UL 924, NEC, OSHA, NFPA 101, UL 2043
Warranty Type	5-Year	Type	Emergency Load Controller

Dimensions

Product Width US	2.2 in	Product Weight US	0.3 lb
Product Volume US	26.1 cu in	Product Depth US	1.9 in
Product Height US	3.0 in		

Additional Information

RoHS Compliant	Yes	Security	Yes
----------------	-----	----------	-----

Technical Information

Operating Temperature Min	32 °F	Load Rating	10 A @ 120 VAC, 20 A @ 277 VAC
Compatibility	EMTS-100	Contact Configuration	N-C
Contact Rating	24 VDC	Operating Temperature Max	131 °F
Number of Relays	0	Input Voltage	120 to 277 VAC
Line Frequency	50 Hz, 60 Hz	Indoor/Outdoor	Indoor
Mounting Type	1/2 in Knockout	Operating Temperature	32°-131°F
Operating Humidity	5-95% RH (Non-Condensing)	Location Rating	Dry
Wire Connection Type	Flying Leads	Storage Temperature	23° - 176° F